

NFTs: A great way to support digital artists on the blockchain, or a nifty tool for grifters?

Jonathan A. Poritz

jonathan@poritz.net
poritz.net/jonathan



4 March 2022



This slide deck, except where otherwise indicated, is by [Jonathan Poritz](#) and is released under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

An editable form of these slides is available at poritz.net/jonathan/share/NFTs4CC/.

Land acknowledgement

Before we begin, we must acknowledge that those of us in the room are physically located at this moment within the unceded territory of the Ute Peoples. The earliest documented people in this area also include the Apache, Arapaho, Comanche, and Cheyenne. An extended list of tribes with a legacy of occupation in this area can be found here: [Colorado Tribal Acknowledgement List](#).

The Plan for This Fearless Friday

- Our entry point to *blockchains* will be *bitcoin* (the most widely known *cryptocurrency*¹)
- We'll explain blockchains by talking about some basic primitives (black boxes, if you like) from *crypto*²
- Some of those primitives use a fair bit of math, to which we'll take a lightning visit.
- We'll critique some common use cases of blockchains.
- NFTs are one such use case where the Emperor has absolutely no clothes on at all.
- The goal is for you to understand enough about this bit of computer science that when you read stories about it in the press (or hear some examples I will give) you shake your head and wonder if you are crazy or if the world has gone insane.

¹ it has become common to shorten *cryptocurrency* to *crypto*, but this conflicts with the use of *crypto* as short for *cryptology*, which is the way I use it!

² see?

Origins of the Blockchain Whirlwind: Bitcoin

Bitcoin: A Peer-to-Peer Electronic Cash System

In October 2009, the pseudonymous *Satoshi Nakamoto* posted a paper → to a cryptography mailing list.

Satoshi Nakamoto
satoshiin@gmx.com
www.bitcoin.org

He or she shortly thereafter also posted, to a FLOSS sharing site, source code for a reference implementation of the proposed protocol.

Abstract. A purely peer-to-peer version of electronic cash would allow online payments to be sent directly from one party to another without going through a financial institution. Digital signatures provide part of the solution, but the main benefits are lost if a trusted third party is still required to prevent double-spending. We propose a solution to the double-spending problem using a peer-to-peer network. The network timestamps transactions by hashing them into an ongoing chain of hash-based proof-of-work, forming a record that cannot be changed without redoing the proof-of-work. The longest chain not only serves as proof of the sequence of events witnessed, but proof that it came from the largest pool of CPU power. As long as a majority of CPU power is controlled by nodes that are not cooperating to attack the network, they'll generate the longest chain and outpace attackers. The network itself requires minimal structure. Messages are broadcast on a best effort basis, and nodes can leave and rejoin the network at will, accepting the longest proof-of-work chain as proof of what happened while they were gone.

1. Introduction

Commerce on the Internet has come to rely almost exclusively on financial institutions serving as

3

At which point, Yoda could be heard muttering, “*Begun, the Bitcoin Wars have.*”

³ the full paper is here: bitcoin.org/bitcoin.pdf

Some Bitcoin Hype

Maybe not a good currency?




4

⁴ from the page [Bitcoin price](https://www.coinbase.com/en-us/price/bitcoin) on [coinbase](https://www.coinbase.com/); snapshot taken 12:31pm MT 3 March 2022; used by fair use.


A Fly in the Ointment Here, a Few Megatons of CO₂, There

Unfortunately:

Annualized Total Bitcoin Footprints

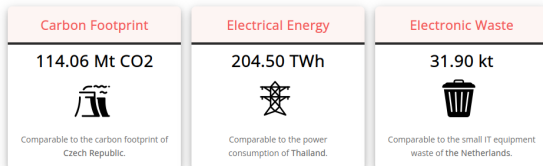

Single Bitcoin Transaction Footprints

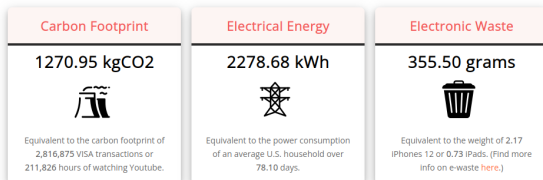

5

⁵ from the page [Bitcoin Energy Consumption Index](#) on [digiconomist.net](#); snapshot taken 6:52pm MT 3 March 2022; used by fair use.

Diving Into the Deep End: How a Blockchain Works

Why does it consume so much power? I thought you'd never ask.

To answer, we must talk about how bitcoin works. The underlying technology is called a *blockchain*, so we'll talk a bit about **How a blockchain works**.

A blockchain is built out of three basic pieces [cryptographic primitives]:

- *digital signatures*,
- a *cryptographic hash function*, and
- a *distributed consensus protocol*.

The above three pieces are basically

- a *really distinctive, highly personalized flourish* one can add to digital files,
- a *very effective way of fingerprinting* digital files, and
- an *method for group decision-making* [for groups that meet only on the 'net, never in person].

References for Cryptology

Crypto tends to intimidate users, because they hear that small mistakes can be fatal. But that is also true of many things in life, and we don't let it stop us.

The other problem with crypto is that it is fairly *mathy*. Which is a feature, not a bug ... to a mathematician, but maybe not to others.⁶

The good news is that there are great free/open resources on the 'net. For example:

- Chapter 4 of my open textbook **Yet Another Introductory Number Theory Textbook [YAINTT]**, which can be found at poritz.net/jonathan/share/yaintt.pdf [although, being a math textbook, this is rather unabashedly *mathy* – even though that Chapter has a lot of history and terminology.]; or
- Ed Felton's [Princeton professor of computer science and Deputy Chief Technology Officer under Obama] **Nuts and Bolts of Encryption: A Primer for Policymakers**, found at https://www.cs.princeton.edu/felten/encryption_primer.pdf, which is not *mathy* at all.

⁶because the mathematical community has done a terrible job of sharing the joy and beauty of our subject!

Our protagonists, and an adversary

Most works of cryptology speak of two star-crossed lovers, *Alice* and *Bob*, who attempt to keep the guttering candle of their love alight, though distance separates them and their communications are being monitored by the evil *Eve*.



7

[Extra credit if you can name the two famous mathematicians who acted as models for these pictures of Alice and Bob.]

⁷ “Alice” and “Bob” images in the public domain; “Eve” from [Pirate Riley](#). [Aaarrhh Me Hearties!](#) which is by [peasap](#) and is licensed under [CC BY 2.0](#); thanks, [CC Search!](#)

Why is Eve so powerful?

It's important to realize that in many – maybe **most** – situations, it is entirely appropriate to assume that Eve can see all the communication between Alice and Bob while it is in transit. All of the channels you are used to using suffer from this:

- A cell phone is basically a *walkie-talkie with infrastructure* [the infrastructure being all those cell towers all over the place]. Anyone with a radio receiver of the right type who is within the footprint of the same tower can hear the entire exchange. [**Stingrays!**] [although, actually, cellphone communications are highly encrypted]
- Satellite phones are much worse: the footprint is the size of a continent, often.
- Anything you do on the Internet is essentially public [unless encrypted].

Here is a diagram with some basic terminology:

Alice	on public network	Bob
plaintext/cleartext message m encrypts m to c transmits c	$\rightarrow$ ciphertext c $\rightarrow$	receives c decrypts c to recover plaintext m

A **symmetric cipher** (or **symmetric cryptosystem**) consists of the following parts, all known to both the communicating parties and the public in general:

- a message space $\mathcal{M}$
- a keyspace $\mathcal{K}$
- an encryption algorithm which creates a ciphertext $c = e_k(m)$ for any choice of $k \in \mathcal{K}$ and $m \in \mathcal{M}$.
- a decryption algorithm which generates a message $d_k(c) \in \mathcal{M}$ given a ciphertext c and a $k \in \mathcal{K}$, which satisfies $d_k(e_k(m)) = m \forall k \in \mathcal{K}, m \in \mathcal{M}$.

Alice and Bob can use such a symmetric cipher by agreeing in private upon a key $k \in \mathcal{K}$ they will use for both encryption and decryption. For this reason, symmetric cryptosystems are also called **private key cryptosystems**.

Keys [for symmetric cryptosystems]

Because humans are not good self-critics, it is a good idea to publish your encryption and decryption algorithms, to let others see if they can find any flaws.

If the algorithms are to be made public, the security of a cryptosystem must lie in some other secret: the key.

private communication of shared key $k \in \mathcal{K}$		
Alice	$\longleftrightarrow$	Bob
	on public network	
message $m_A \in \mathcal{M}$ compute $c_A = e_k(m_A)$ transmit c_A	$\rightarrow$ ciphertext c_A $\rightarrow$	receive c_A compute $m_A = d_k(c_A)$
receive c_B compute $m_B = d_k(c_B)$	$\leftarrow$ ciphertext c_B $\leftarrow$	message $m_B \in \mathcal{M}$ compute $c_B = e_k(m_B)$ transmit c_B
etc....		

Notes on symmetric cryptosystems

The keyspace $\mathcal{K}$ must be large, otherwise Eve can just try all keys and see which works [which is called a **brute-force attack**].

Symmetric cryptosystems are fast — you can run a video stream through one without noticing it on a consumer-grade PC.

The design of symmetric cryptosystems is something of a black art. There is little general theory on the attack or defense side, and the algorithms tend just to be along the lines of *scramble the bits a lot*. See, e.g., the pretty pictures on [the Wikipedia page for AES](#)

Some examples:

- The *Scytale* – ancient Greece
- The *Caesar cipher* – actually used by Julius Caesar. [addition mod 26...]
- The *Vigenère Cipher* – thought to be unbreakable for centuries. Easy to break today.
- The *one-time pad* – completely **unbreakable**; hard to use in practice (but see Leo Marks' **Between Silk and Cyanide: A Code Maker's War 1941-45**)
- The *Enigma machine* – a German military coding device from WWII.
- Modern block ciphers like *DES*, *triple-DES*, *AES*, etc.

Asymmetric cryptosystems, I

If Alice and Bob want to be able to communicate securely without ever having met to exchange the symmetric key, they can instead use a completely different type of cryptosystem:

An **asymmetric cipher** (or **asymmetric cryptosystem**) consists of the following parts, all known to any interested party, licit or il-:

- a message space $\mathcal{M}$
- an encryption keyspace $\mathcal{K}_e$
- a decryption keyspace $\mathcal{K}_d$
- a way of associating encryption keys to decryption keys, by a one-to-one function $\mathcal{E} : \mathcal{K}_d \rightarrow \mathcal{K}_e$
- an encryption algorithm which creates a ciphertext $c = e_{k_e}(m)$ for any choice of $k_e \in \mathcal{K}_e$ and $m \in \mathcal{M}$.
- a decryption algorithm which generates a message $d_{k_d}(c) \in \mathcal{M}$ given a ciphertext c and a $k_d \in \mathcal{K}_d$, which satisfies $d_{k_d}(e_{\mathcal{E}(k_d)}(m)) = m \ \forall k_d \in \mathcal{K}_d, m \in \mathcal{M}$.

To use such a cryptosystem, Bob picks a decryption key k_d , without telling it to anyone – but he makes the corresponding encryption key $k_e = \mathcal{E}(k_d)$ publicly available (probably on his website). For this reason, k_e is also called his **public key** and k_d his **private key**, while the whole system is called a **public-key cryptosystem**.

Asymmetric cryptosystems, II

Graphically:

Alice	on public network	Bob
download k_e	$\leftarrow$ public key k_e $\leftarrow$	pick $k_d \in \mathcal{K}_d$ compute $k_e = \mathcal{E}(k_d) \in \mathcal{K}_e$ publish k_e
message $m \in \mathcal{M}$ compute $c = e_{k_e}(m)$ transmit c	$\rightarrow$ ciphertext c $\rightarrow$	receive c compute $m = d_{k_d}(c)$

That this is possible at all is very cool. There are a few ways we do it, now, including **RSA** (named after Ron Rivest, Adi Shamir, and Leonard Adelman, who published this idea in 1977) and **elliptic curves** (which are more efficient but less commonly used, since their mathematics is significantly harder to chew than what is behind RSA).

All asymmetric crypto relies upon a mathematical function which is easy to compute in one direction but difficult to invert. For RSA, this is essentially multiplication forward [easy], but factoring backwards [hard]. For other asymmetric algorithms, there are other of these *one-way functions*.

Some Details of RSA

Alice	on public network	Bob
download k_e	$\leftarrow$ public key k_e $\leftarrow$	pick large primes p and q compute $n = pq$ pick $e \in \mathbb{N}$ with $\gcd(e, \phi(n)) = 1$ publish $k_e = (n, e)$ compute $d = e^{-1} \pmod{\phi(n)}$
message $m \in \mathbb{Z}$ with $0 \leq m < n$ compute $c = e_{(n,e)}(m)$ $= m^e \pmod{n}$ transmit c	$\rightarrow$ ciphertext c $\rightarrow$	receive c compute $m = d_{(n,d)}(c)$ $= c^d \pmod{n}$

Note that the message space here is $\mathcal{M} = \{m \in \mathbb{Z} \mid 0 \leq m < n\}$, so actual text must be broken into chunks [blocks] which can be represented by integers in that range.

The “Person-in-the-middle attack”

A significant issue with asymmetric cryptosystems is the necessity of a **Public-key Infrastructure [PKI]**, because of the dreaded **person-in-the-middle attack**:

Alice	Eve	Bob
		generate keys: public k_e^B , private k_d^B publish k_e^B
	intercept $k_e^B \leftarrow$	
download k_e^E	generate keys: public k_e^E , private k_d^E $\leftarrow k_e^E$, spoof origin	
message $m \in \mathcal{M}$ compute $c_A = e_{k_e^E}(m)$ transmit c_A	$\rightarrow c_A$, intercept	
	extract the cleartext $m = d_{k_d^E}(c_A)$ change to m' if desired compute $c_E = e_{k_e^B}(m')$ spoof origin $c_E \rightarrow$	
		receive c_E read the message $m' = d_{k_d^B}(c_E)$

Digital Signatures

Therefore, we need to be sure that the public keys we use really do belong to the people who we think they do. We do this either by getting the key from someone in person – but that kind of ruins the whole idea of asymmetric crypto! – or we get a key in some way that we are sure of its provenance. One way to be sure would be to have a **digital signature** on the public key, signed by someone whom we trust. Signatures work like this:

Larry	on public network	Bob
download k_e	$\leftarrow$ public key k_e $\leftarrow$	pick $k_d \in \mathcal{K}_d$ compute $k_e = \mathcal{E}(k_d)$ publish k_e
receive (m, s)	$\leftarrow$ signed message (m, s) $\leftarrow$	message $m \in \mathcal{M}$ compute $s = d_{k_d}(m)$ transmit (m, s)
if $e_{k_e}(s) = m$ ACCEPT otherwise, REJECT		

How to Think Critically About Security/Privacy/Cryptography

Things to think about when learning and critically assessing cryptological gizmos:

- What exact problem was it designed to solve?
 - What [exactly] are the inputs and outputs.
 - What [precise] assumptions are made about *who* knows *what*, *when*?
 - What [precise] assumptions are made about how the adversary will try to break the system – what is the *threat [or attack] model*?
 - What computational power is available to the allies and to the adversaries?
- How confident is the community in the effectiveness of the proposed technique?
 - Is there a mathematical proof, based on just mathematical truths.
 - Is there a mathematical proof that breaking the proposed technique would be equivalent to solving some well-studied problem?
 - Does the security of the proposed technique rest on some engineering factors – e.g., is there a way known to break the technique if we could be a certain new kind of computer?

and, often the most important issue by far:

- How reasonable are the assumptions in a real-world context where we want to use this new technique?

E.g., Thinking Critically About Digital Signatures

The problem: Bob has a secret key with corresponding public key that is reliably known to the whole community as being his. He also has a message he wants to sign.

Bob will transmit to Larry the message along with an extra piece of data, the digital signature. Larry can use the widely known public key associated to Bob, the message, and the signature data to determine if only someone who knew Bob's secret key could have produced that signature on that message.

In the case of RSA-based digital signatures, there is a mathematical proof that breaking this signature scheme would amount to figuring out how to factor large numbers quickly, at which many mathematicians have been unsuccessful for many years.

There is a way to factor large numbers if engineers can build a *quantum computer*. This used to be thought of as far in the future, if ever even possible; now we think it might be 25 years or fewer off. So it will be possible to forge RSA signatures in ≤ 25 years.⁸

In the real world, it is very hard to keep a secret key secret forever. It is also very hard to associate public keys to a public identity reliably. Therefore **a robust PKI is a essential** for digital signatures to work in practice, and it is hard to make one and keep it healthy.

⁸ Actually, almost all digital signature schemes fall to quantum computers, not just RSA-based ones.

Cryptosystems: What to Remember

Encryption is important: messages on the Internet are as open as postcards.

Symmetric cryptosystems:

- Are fast.
- Have very little structure: “just fiddle with the bits.”
- So our confidence on them is based on smart people trying hard to break them.
- Require a previously shared secret key – **key management**.

Asymmetric cryptosystems:

- Are slow.
- Have a lot of *mathy* structure.
- So our confidence in them is based on math, although we do know many of them break with quantum computers.
- **Key management** is crucial, particularly a *Public Key Infrastructure [PKI]*

Digital signatures:

- Are based on asymmetric cryptosystems.
- Strongly link specific messages to specific (public, private)-key pairs.

Cryptographic Hash Functions

A *cryptographic hash function* is an algorithm which takes arbitrarily large chunks of data as input, and produces a *hash* [sometimes called a *digest*] of a certain, fixed size – e.g., the most widely used cryptographic hash function today is called **SHA-256** and it always produces hashes consisting of 256 bits, no matter how big the input.

A hash function is called *pre-image resistant* if it is very hard⁹ given any particular possible hash value, to find an input data chunk whose digest has that value.

A hash function is called *second pre-image resistant* if it is very hard, given one input data chunk, to find a second which hashes to the same digest as that chosen first chunk.

Basically, a hash function is a blender into which you pour data, which blends all its input thoroughly and produces a small output pellet. The pellet is almost unique to that set of ingredients, in the sense that it would take many lifetimes of the universe for you to find another set of input ingredients which would yield the same output pellet.


The problem is described above. Known hashing algorithms are quite complex and have little mathematical structure. Therefore, it is very hard to attack them... but, also, there are not any proofs that they do what we hope they will. Old hash functions, for example, are no longer used because we now know how to break them.

⁹ meaning that, essentially, one should just have to keep trying random inputs until one gets lucky.

Hash Functions As Message Digests and For Chains

Suppose I send you a big file and we want to be sure it didn't get corrupted in transit. I could compute a hash of that data on my end, you could do the same on yours, and I could read you the digest over the phone – if they agree, we'd be quite certain the files agree as well.

You can use hash functions to make **immutable chains**. Suppose we all agree on some block of starting data, called the *genesis block* in the blockchain community. Then we start attaching new blocks to the list of official, on-chain blocks, by some sort of distributed agreement process, **and also** putting the hash of the previous block into each new block on the chain – this is called a *hash chain*. If, afterwards, we have a dispute about what the whole chain is, we could each run down the whole chain, checking that each hash value in the n^{th} block is equal to the hash of the $(n - 1)^{\text{st}}$ block. Since it is hard to find second-preimages for good hash functions, this is impossible to forge, and thus it is impossible to change the old blocks on an existing chain: hash chains are immutable!



Hash Functions to Slow Computers Down

Suppose you want to slow someone down. You could had them a chunk of data and ask them to find some other piece of data to add to that such that when they hashed the big, joined data chunk, the output hash would end in at least five (or seven or ten or whatever, depending upon how much you want to slow them down) 0s.

You couldn't ask for them to find data which will make the hash value exactly equal some given value, but instead this task of working to get a certain number of 0s can be done, only with a lot of computation, by just trying over and over again.

The bitcoin protocol uses this method to slow down – and randomly assign a winner, whoever found the second piece of data which makes the whole thing have a hash ending in a certain number of 0s – all of the people working around the globe to verify transactions made on the bitcoin network. The number of 0s needed to win this competition can be changed as the total amount of computational power on planet Earth dedicated to doing this (stupid, useless, but un-short-cut-able) work increases, so that even with all that power, there will only be winner about once every ten minutes.

The total hashing power on planet Earth right now can do about 201.60 quintillion SHA-256 hashes per second¹⁰ – that's 2.01×10^{20} hashes per second. Much if this is in special hardware in hashing farms which used to be in China.

¹⁰ see [Bitcoin Hashrate Chart](https://poritz.net/j/share/NFTs4CC)

Hash Functions: What to Remember

Hash functions crunch arbitrarily large input data files into a **digest** (think of it as a *fingerprint*) which cannot be predicted and pretty much is unique to that input data compared to all other datasets the human race is likely to create until the heat death of the universe.

Also:

- They are fast.
- They have very little structure: “just fiddle with the bits.”
- So our confidence on them is based on smart people trying hard to break them.
- The community is pretty confident at the moment about SHA-256 (although md5 died a while ago and SHA-1 is considered too shaky to be trustworthy).

Distributed Consensus

Suppose you have a block of transactions – maybe people submitting records of buying or selling goods by transferring some artificial *cryptocurrency* among users – you want to submit to a global, public ledger. It is important that everyone agrees upon what are the valid blocks, because otherwise a bad actor could spend some cryptocurrency on one transaction in one block, and the same cryptocurrency in another transaction with someone else: this is **the double-spend problem**.

The easiest way for this to work is if there is a central party who collects all proposed blocks and simply decides which ones will go on the chain, perhaps by first-come-first-served, perhaps by playing favorites (or so people fear). Such a central decision-maker is called a *trusted third party [TTP]* by cryptologists. Distributed consensus is very easy, fast, and efficient with a TTP.

Without a TTP, as bitcoin tries to go, much more work is required. The bitcoin approach is to make everyone do the “hash to get a certain number of 0s” game, and then publish their winning extra bit of junk data. Whoever wins can prove it, with that data, and gets to submit their preferred block to the global public ledger.

Sometimes, two people will win at the same time in different places, and the chain will split. But if half of the network works on growing one chain and half works on the other, pretty quickly it will be very likely that one will be quite a bit longer than the other, and everyone will go over to the longer valid chain at that point.

Wrapping Up The Blockchain Bow

The term **blockchain** is used to describe a hash chain whose globally recognized individual blocks are agreed upon by a distributed consensus protocol.

Generally, those who can submit blocks come from a very open group – potentially *anyone*¹¹ – and follow some internal rules such as for maintaining a cryptocurrency ledger or running an on-chain Turing-complete programming language [*Ethereum*, a company based in the Crypto Valley, calls these on-chain programs **smart contracts** in an essentially meaningless bit of excellent marketing].

Another differentiator between different blockchains is how the individuals in the group of participants identify themselves. Generally, the choice is with some identity strictly coupled (hopefully) to a real-world individual or entity **or** one where individuals act through pseudonymous (hopefully¹² IDs. Both require some kind of reliable PKI, however!

Different blockchains use different consensus protocols: bitcoin's *proof of work* has a horrible carbon cost, is slow, etc. Another protocol is based on *proof of stake*, which is less energy-intensive but amounts to formalizing a strategy of **the rich always get richer**.

¹¹ Some people restrict this group and then talk about *permissioned blockchains*, but I think that is pretty much the same as *freeze-dried water*.

¹² This has turned out to be much harder than it seemed it would be, e.g., in bitcoin's case.

Thinking Critically About Blockchains

Whatever particular version of a blockchain, the solution it provides [in the spirit of our *Thinking Critically About Security...* strategy above] involves these key features:

- A chain of linked, sequential **public** records.
- This [hash] chain is **immutable**.
- Individuals participate in the blockchain through either pseudonymous or intentionally real world-linked IDs supported by a **robust PKI**.
- The progress of the blockchain is realized by a distributed consensus protocol which avoids putting its trust in any particular [third] party.

In short, blockchains are characterized as

- **public**
- **immutable**
- relying on a **robust PKI**
- eschew **TTPs**.

The constituent cryptographic pieces that realize these characteristics may or may not be generally thought of as reliable, but the ways these blocks are combined is not much subject to debate.

Whether the above characteristics are reasonable assumptions in any particular real-world context is much more questionable....

Blockchains ... Of Limited Use?

The integrity of the bitcoin ledger is based on a huge amount of (useless) work, needed because cryptocurrency fanatics don't trust the government: it's all about the TTP.

Now what about other use-cases?

Educational institutions should “put student credentials on the blockchain:” it's public, immutable, and not subject to any single party's control.

But this is nonsense. There is a natural TTP for a credential: the issuing institution! OK, we need a functioning PKI, but so does a blockchain-based credential system (the credential would have to be signed, in its form “on the chain,” as well).

Walmart will “put its supply chain on the blockchain.”

But this is nonsense. There is a natural TTP for a Walmart's supply chain: Walmart trusts Walmart!

Marijuana producers in Colorado will put their production records on a blockchain so that the state marijuana oversight organization will be able to check that it has all been produced according to state law.

But this is nonsense. There is a natural TTP here as well: that state supervisory agency! Also, just having a cryptographically verified blockchain doesn't mean that the data entered in its blocks corresponds correctly with the real world: this is a misreading of the idea of “trust” here.

Cryptocurrencies

Cryptocurrencies at blockchains which allow *actors* to perform transactions which add or subtract to their accounts.

“Actors” are defined as (public, private)-key pairs [!!!].

Those accounts are like bank accounts, they just have a number in them.

The transactions will deduct a number from an input account (or accounts) and credit it to an output account (or accounts), often owned by different actors.

Since the numbers being added and subtracted are all just numbers, the units of this “currency” are all **fungible**, one of the defining properties of an actual currency.

The consensus protocol makes sure the global community agrees upon the current values of all accounts.

Doing the work to run the consensus protocol is called “mining,” and usually the actor who succeeds in validating a block of transactions gets a reward of some amount of the cryptocurrency.

The full hash chain, which records all transactions that have achieved consensus, is often enormous: the Bitcoin blockchain is 393.41GB as of 2 March 2022¹³.

¹³see [Bitcoin Blockchain Size](https://poritz.net/j/share/NFTs4CC)

Finally, NFTs


NFTs put either entire digital objects into some blockchain, or, much, much more often, just a reference such as a URL or an identifier on the IPFS (which is an Internet-wide distributed storage mechanism that is something like a grown-up version of bit torrent).

The protocol does not treat these objects as numbers in an account like for a cryptocurrency, so there is nothing at all like splitting up an object and depositing it in some other accounts. In this sense, the objects are **non-fungible**.

Blockchains for NFTs have a special operation (in addition to something like *mining* for cryptocurrency blockchains) called **minting** an NFT. This involves creating a block on the chain which has the digital object in it, with some actor as the “owner.” Other actors can then do transactions which transfer “ownership” of that data block to another actor when compensated by real- or cryptocurrency. (Remember: here, “actor” = “key pair.”)


Additionally, the “owner” of a minted NFT can issue a transaction to the corresponding blockchain, using the power that actor [key pair!] has to issue valid digital signatures, transferring the ownership to another actor. This is often done in exchange for the transfer of cryptocurrency (maybe even on the same blockchain), or simply a check for real currency.

Example NFTs

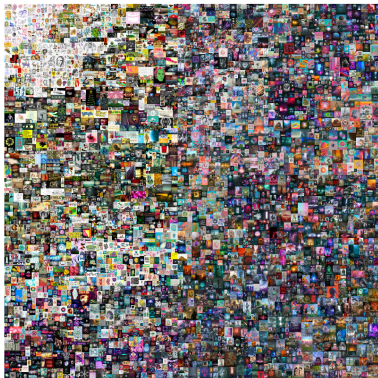

14

sold for \$69,346,250
on 11 March 2021
by [Christie's Auction House](#)



15

sold for \$3,000 (accidentally)
on 11 December 2021
on [OpenSea](#)

¹⁴ [Beeple, The First 500 Days](#); used by fair use

¹⁵ [Bored Ape](#); used by fair use

Copyright and Licensing Issues for NFTs

As far as I understand things (but **IAmNotALawyer!**), minting an NFT is almost exactly like putting some URL on a website I own along with a bit of text that says “I like the artwork [or whatever] is at the end of this link.”

There should be no copyright consequences for that, it is not a copy!

Licensing that NFT would be very odd: does that short web page with URL and statement even have enough creativity even to have a copyright? Rights for that page should be (unless there are some platform Terms of Service or otherwise other contracts signed) completely independent of rights over the object at the end of the link.

Of course, the platform that runs that blockchain [but wait a second, the whole point of blockchains is that they are decentralized! ... but in practice, most NFTs are on particular platforms] may have Terms of Service, or an auction house which helps inflate the price of a NFTs may have contracts which buyers and sellers have to sign, that require some intellectual property rights over the material at the end of the URL, and/or which transfer those rights upon sale of the NFT.

Absent such legal instruments external to the NFT platform (which externalities really give up on Lessig’s famous “code as law” approach to technology), the NFT *per se* seems to be merely a way of publicly registering one’s patronage of an artist or artistic work¹⁶.

¹⁶ If this is true, then there really should be no re-sale market in NFTs: “owning” the NFT is all about public support of the artist, so a third party buying it from the original patron would not support the artist, nor would it gain the purchaser anything.

The Blockchain's New Clothes

I love the technology in blockchains. It is very beautiful computer science. I love teaching this computer science.

But I don't think Emperor Blockchain, in any of his forms (cryptocurrencies, "academic credentials on the chain," NFTs, etc.) has any clothes on.

I think approximately 100% of proposed blockchain applications make absolutely no sense.

I have been told by some blockchain enthusiasts that blockchains have magical properties which I know for a fact they absolutely do not have. I don't know if these people are good or bad actors (the downfall of prominent blockchain enthusiast Alex Tapscott proves that there are at least some bad actors), or have simply been misinformed.

It's possible that this is case of *regulatory capture by metaphor*: computer scientists use "trust" and many related words when talking about these topics – "trusted third party," "proof [of work, etc.]," "verifiable signature," ... – but those are just **metaphors**! It is a mistake to take them too literally, as seems to be done nearly universally in the blockchain world.

And yet this insanity continues: cryptocurrencies

All Cryptocurrencies

Cryptocurrencies ▾ Exchanges ▾ Watchlist									
Filters USD ▾ -- Back to Top 100									
Rank	Name	Symbol	Market Cap	Price	Circulating Supply	Volume(24h)	% 1h	% 24h	% 7d
1	 Bitcoin	BTC	\$773,900,831,003	\$40,786.68	18,974,350 BTC	\$26,299,349,012	-0.05%	-3.98%	4.41% ...
2	 Ethereum	ETH	\$321,602,814,569	\$2,683.98	119,822,945 ETH	\$13,798,200,888	0.07%	-4.88%	-0.70% ...
3	 Tether	USDT	\$79,542,968,496	\$1.00	79,513,056,448 USDT *	\$58,345,599,956	0.02%	0.00%	-0.01% ...
4	 BNB	BNB	\$64,295,477,900	\$389.39	165,116,761 BNB *	\$1,597,761,241	0.13%	-3.17%	5.75% ...
5	 USD Coin	USDC	\$53,150,963,282	\$0.9997	53,164,612,711 USDC *	\$4,587,805,024	0.01%	0.00%	-0.03% ...
6	 XRP	XRP	\$35,397,570,586	\$0.7382	47,949,281,138 XRP *	\$2,099,271,619	-0.08%	-0.90%	4.22% ...
7	 Terra	LUNA	\$33,647,119,811	\$90.63	371,264,527 LUNA *	\$3,506,724,706	-0.21%	2.70%	32.42% ...
8	 Cardano	ADA	\$29,474,169,872	\$0.8756	33,661,194,163 ADA	\$1,008,176,579	0.22%	-2.40%	-0.10% ...
9	 Solana	SOL	\$29,461,044,132	\$91.89	320,597,063 SOL *	\$2,409,980,527	-0.05%	-3.55%	1.75% ...
10	 Avalanche	AVAX	\$21,263,965,645	\$80.13	265,379,995 AVAX *	\$1,719,777,001	0.84%	2.61%	3.44% ...
11	 Binance USD	BUSD	\$17,985,188,463	\$0.9994	17,996,245,421 BUSD *	\$5,329,326,613	-0.14%	-0.18%	0.04% ...
12	 Polkadot	DOT	\$16,936,016,351	\$17.15	987,579,315 DOT *	\$1,048,326,047	0.02%	-5.41%	4.58% ...
13	 Dogecoin	DOGE	\$16,771,089,272	\$0.1264	132,670,764,300 DOGE	\$582,039,783	-0.27%	-1.95%	0.70% ...

17

¹⁷ from the page [All Cryptocurrencies](#) on [CoinMarketCap](#); snapshot taken 12:11pm MT 4 March 2022; used by fair use.

And yet this insanity continues: NFTs

Highest Price NFT Stats

Below are listed the stats for NFT collections and individual assets that have sold for the highest prices. We the data list in descending order. Data can be reordered by clicking on the column title.

24h 7d 30d All Time

Market Cap

\$10,051,251,932.14

▼ 38.24%



Sales Volume (24h)

\$36,275,801.63

▼ 26.47%



Total Sales (24h)

23,666

▼ 2.65%



🔥 Top NFT Collections

[View More >](#)

#	Name	Volume 24h	Est. Market Cap	Floor Price	Avg. Price 24h	Sales 24h	Assets	Owners	Owners%
1	WonderPals Ethereum	2,146.4 ETH ▲ 0.2%	10,094.14 ETH	0.82 ETH	0.814 ETH ▲ 0.2%	2,637 -	10,000	6,969	69.69 %
2	WIN NFT HORSE BSC	3,057,025 BUSD ▼ 59.28%	175,862,795.62 BUSD	225 BUSD	11,988.33 BUSD ▼ 28.3%	255 ▼ 43.21%	10,000	892	8.92 %
3	CLONE X Ethereum	1,128.89 ETH ▲ 0.02%	354,344.19 ETH	12.5 ETH	28.22 ETH ▲ 0.02%	40 -	18,944	8,424	44.47 %
4	Azuki Ethereum	790.6 ETH ▲ 0.18%	127,235.28 ETH	8.4 ETH	11.98 ETH ▲ 0.18%	66 -	10,000	5,525	55.25 %
5	Invisible Friends Ethereum	688.53 ETH ▲ 0.03%	42,639.56 ETH	5.5 ETH	9.3045 ETH ▲ 0.03%	74 -	5,000	4,194	83.88 %
6	CryptoPunks Ethereum	650.14 ETH ▼ 0.05%	563,981.32 ETH	--	72.24 ETH ▼ 0.05%	9 -	9,999	3,407	34.07 %
7	Bored Ape Yacht Club Ethereum	645.59 ETH ▼ 0.03%	1,109,299.74 ETH	83.78 ETH	92.23 ETH ▼ 0.03%	7 -	10,000	6,336	63.36 %
8	Mutant Ape Yacht Club Ethereum	500.02 ETH -	346,274.43 ETH	17.25 ETH	18.52 ETH -	27 -	17,983	11,832	65.8 %

18

18 from the page [Highest Price NFT Stats](#) on [CoinMarketCap](#); snapshot taken 12:13pm MT 4 March 2022; used by fair use.

Resources

- ▶ [NFT Gains Mostly Go to Small Group of Investors: Study](#) [Bloomberg]
- ▶ [Mapping the NFT revolution: market trends, trade networks, and visual features — Scientific Reports](#) [From **Nature**]
- ▶ [Non-fungible tokens \(NFTs\)](#) [Slides from a presentation to the European Observatory on Infringements of IP Rights]
- ▶ [Right-Clicker-Mentality](#) [great short commentary by Cory Doctorow]
- ▶ [Stephen Diehl's Blog](#) [a very insightful techie]
- ▶ [Attack of the 50 Foot Blockchain](#) ["Blockchain and cryptocurrency news and analysis by David Gerard"]
- ▶ [There's No Good Reason to Trust Blockchain Technology](#) [Wired article by Bruce Schneier]
- ▶ [Berkeley CS161 Cryptocurrency Lecture](#) and [Blockchains and Cryptocurrencies: Burn It With Fire](#) [videos of a class and a talk, resp., by Nicholas Weaver]
- ▶ [Line Goes Up – The Problem With NFTs](#) [wonderful (long!) video by Dan Olson]
- ▶ [Web3 is going just great](#) [excellent website covering the dumpster fire]
- ▶ [Blockchain Pixie Dust](#) [website by JP]
- ▶ Twitter feeds [@davidgerard](#) [@smdiehl](#) [@ncweaver](#) [@web3isgreat](#)

Discussion!!

Contact info:

Email: jonathan@poritz.net ; Tweety-bird: [@poritzj](https://twitter.com/poritzj) .

Get these slides at poritz.net/j/share/NFTs4CC.pdf and all files for remixing¹⁹ at poritz.net/j/share/NFTs4CC/ .

If you don't want to write down that full URL, just remember
poritz.net/jonathan/share
or poritz.net/j/share
or poritz.net/jonathan [then click **Always SHARE**]
or poritz.net/j [then click **Always SHARE**]
or scan 
[then click **Always SHARE**]



¹⁹ subject to [CC-BY-SA 4.0](https://creativecommons.org/licenses/by-sa/4.0/)